






支吊架采用型钢技术参数

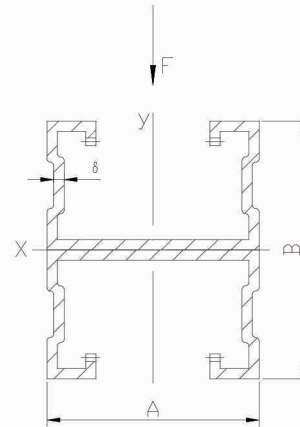

型 号	DHC2520	DHC4120	DHC4125	DHC6220	DHC6225
C 型钢宽度 A(mm)	41	41	41	41	41
C 型钢高度 B(mm)	25	41	41	62	62
壁厚 δ (mm)	2.0	2.0	2.5	2.0	2.5
重量(kg/m)	1.84	2.34	2.87	3.00	3.69
X 轴距槽背 e_1 (mm)	10.93	18.54	18.41	28.73	28.56
X 轴距槽口 e_2 (mm)	14.07	22.46	22.59	33.27	33.44
惯性矩 I_x (cm ⁴)	19961.64	67379.86	80219.73	188454.92	226987.63
惯性矩 I_y (cm ⁴)	68264.11	90268.97	106046.18	118121.13	139932.13
截面模数 w_{x1} (cm ³)	1418.6	2999.7	3550.97	5663.56	6788.71
截面模数 w_{x2} (cm ³)	1826.55	3634.72	4357.63	6560.65	7946.65
截面模数 w_y (cm ³)	3329.96	4403.36	5172.98	5762.01	6825.96
回转半径 i_x (cm)	9.23	15.03	14.81	22.2	21.96
回转半径 i_y (cm)	17.07	17.39	17.03	17.58	17.25

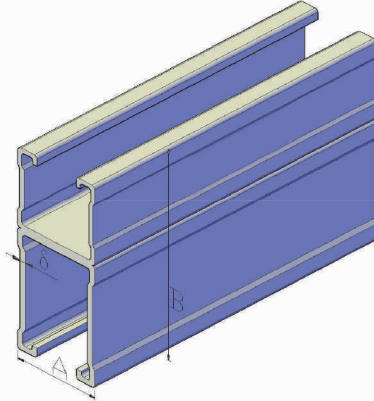

支吊架采用型钢技术参数

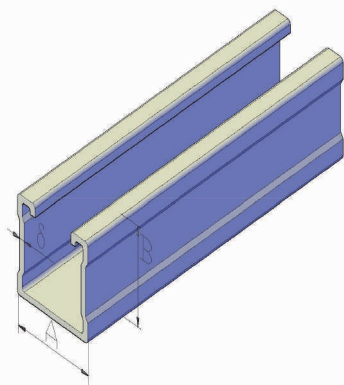

型 号	DHC5020	DHC8220	DHC8225	DHC12420	DHC12425
C 型钢宽度 A(mm)	41	41	41	41	41
C 型钢高度 B(mm)	50	82	82	124	124
壁厚 δ(mm)	2.0	2.0	2.5	2.0	2.5
重量 (kg/m)	3.68	4.68	5.74	6.00	7.39
惯性矩 I_x (cm ⁴)	95197.34	337788.81	405628.26	1003016.31	1215616.64
惯性矩 I_y (cm ⁴)	120434.22	164443.93	199186.11	220148.25	266958.01
截面模数 w_x (cm ³)	3807.89	8238.75	9893.37	16177.68	19606.72
截面模数 w_y (cm ³)	5874.84	8021.66	9716.4	10738.94	13022.34
回转半径 i_x (cm)	14.25	23.79	23.56	36.21	35.94
回转半径 i_y (cm)	16.03	16.6	16.51	16.97	16.84